

## PN322 Fitting Instructions


### Fitting instructions

1. Prepare circular hole in floor 4" minimum, 6" maximum, 3" deep.
2. Push the decorative cover (1) onto the lower portion of the upright tube (2) and screw the locknut (3) on to the thread as far as it will go.
3. Screw the mounting flange (4) onto the upright tube.
4. Tighten the locknut (3) on to the mounting flange (4).
5. Screw the water feed pipes (5) into the base of the fitting. Follow the instructions on the pipes for correct installation.
6. Pass the feed pipes through the hole in the floor and screw the mounting flange (4) to the floor.
7. Push the decorative cover (1) onto the floor.
8. Apply petroleum jelly to the seal (6) and fit in top of upright tube (2)
9. Screw the collar (7) into the top of the tube (1), hand tightened only.
10. Remove the O ring (8) from the spout.
11. Fit the hose (9) to the outlet, and the handset (11) to the hose, ensuring sealing washers (10) are in place.
12. Connect the feed pipes to supply and check thoroughly for leaks


## A382/A395/A396/A398R

# SHOWERHEAD CLEANING PROCEDURE


Issue 1 – 25 April 03



Radiance




T Bar

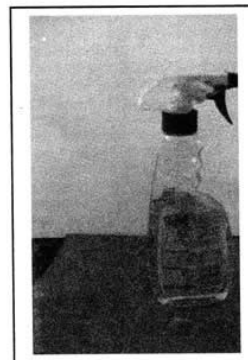

Daily Shower Cleaner use after every shower in hard water areas. Otherwise use weekly.



Rain Bar

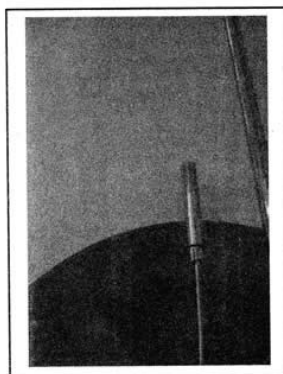

Handset

### 1.0 CLEANING

- 1.1 Use a proprietary “daily shower cleaner/limescale remover” & a stiff brush e.g. nail brush.

**Note:** Ensure the cleaner/remover will not cause damage to the Chrome or Gold decorative finish of the showerhead.

- 1.2 Apply the cleaner/remover as directed on the product packaging to the spray nozzles.

- 1.3 Using a stiff brush & a “stippling” motion clean the nozzles.

**Note:** The “stippling” motion will remove the external & internal (from the holes in the spray nozzles) staining/limescale.

### 2.0 CLEANING FREQUENCY

- 2.1 In “hard water” areas cleaning must be performed after every shower to ensure optimum performance of the product & its associated shower valve.

# **PN322 TEC FREESTANDING MONO BATH SHOWER MIXER.**

Issue: 1

## **TEMPERATURE SETTING & CALIBRATION**

### **1.0 PRE-SET TEMPERATURE**

**1.1 The valve temperature is pre-set at 38°C but on certain installations the setting may need to be adjusted.**

### **2.0 CHECK TEMPERATURE & CALIBRATION**

**2.1 Fully turn on valve water flow.**

**Note: Ensure the hot water is above 60°C.**

**2.2 Set the Temperature Control Knob at the 38°C position & check the temperature of water from the handset or spout – if not at 38°C continue below.**

**2.3 Remove the knob securing screw at the back of the Temperature Control Knob.**

**2.4 Fully remove the Temperature Control Knob.**

**2.5 Relocate the Temperature Control Knob approximately 3mm back on to the splined shaft.**

**Note: Hold in position.**

**2.6 If the pre-set temperature is too hot turn the Temperature Control Knob anti-clockwise to obtain the 38°C.**

**Note: Turn in small increments & allow 10 seconds between each to allow the cartridge to stabilise.**

**Note: If too cold turn the Temperature Control Knob clockwise to obtain 38°C.**

**2.7 When set at 38°C carefully remove the Temperature Control Knob from the splined shaft.**

**2.8 Carefully relocate the Temperature Control Knob on the splined shaft aligning the 38° (on the knob) with the 38 degrees marker located on the valve body.**

**Note: Ensure that the knob is not rotated during this operation, as the temperature will be altered.**

**2.9 Secure the Temperature Control Knob with the fixing screw at the back of the control knob.**